

SPECIFICATIONS

GRAPHIC PANEL SIZES

Finished graphic panel size
2300 x 1200 / 1000 / 800 / 600mm
(Includes 200mm bleed)

Visual graphic area

2100 x 1200 / 1000 / 800 / 600mm

Maximum finished graphic panel thickness

250 micron

SYSTEM SIZES

Boxed size

1200 = 1290 (L) x 210 (W) x 100 (D)mm

1000 = 1090 (L) x 210 (W) x 100 (D)mm

800 = 890 (L) x 210 (W) x 100 (D)mm

600 = 760 (L) x 210 (W) x 100 (D)mm

Assembled size

1200 = 1220 (W) x 190 (D) x 2120 (H)mm

1000 = 1020 (W) x 190 (D) x 2120 (H)mm

800 = 820 (W) x 190 (D) x 2120 (H)mm

600 = 620 (W) x 190 (D) x 2120 (H)mm

BOXED WEIGHTS

Single sided

1200mm = 6.20kg 1000mm = 5.72kg

800mm = 4.44kg 600mm = 3.63kg

Double sided

1200mm = 7.73kg 1000mm = 6.58kg

800mm = 5.62kg 600mm = 4.81kg

COMPONENT LIST

Sidewinder unit complete with poles
(except 600mm wide, where poles
are separate)

Graphic hanger (single sided unit
- 1 hanger, double sided unit
- 2 hangers)



End Trim (x2)

Pole insert for double sided unit


Padded carry bag

SIDEWINDER

ASSEMBLY INSTRUCTIONS

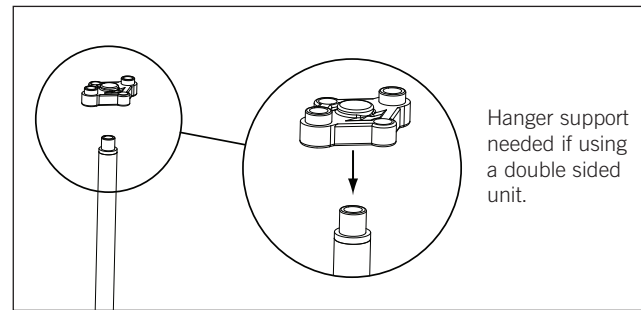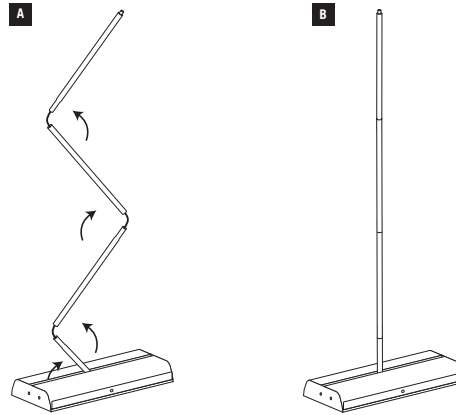


Hanger support
needed if using
a double sided
unit.

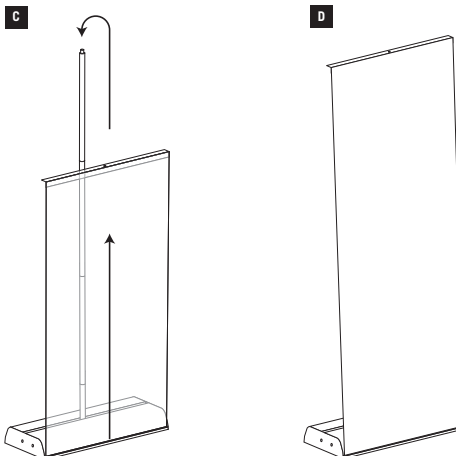


IMPORTANT NOTICE:

When retracting a graphic always slowly guide it into base housing, otherwise graphic damage may occur.


GRAPHIC ATTACHMENT




A Attach top rear of graphic
panel to double sided tape
on top hanger.



B Attach front bottom edge of
graphic panel to double
sided tape on leader sheet,
as shown.



C Holding onto graphic, remove
locking pin and allow graphic
to slowly retract into unit.



D Attach end trims.


ADDING OR REMOVING GRAPHIC TENSION

ADDING TENSION

Insert a standard flat headed screwdriver
into slot located in the end of unit and turn
clockwise to add extra graphic tension.

REMOVING TENSION

To un-tension graphic panel place a flat
headed screwdriver into the slot and push
to disengage ratchet. Hold in and turn anti-
clockwise until tension in spring is
released. To remove graphic panel
carefully peel it off leader sheet. The
graphic hanger can also be removed or a
new hanger can be purchased.



IMPORTANT NOTICE:

To ensure a proper bond between graphic and double sided tape pressure must be applied. The adhesive should be allowed to cure for 24 hours before tension is applied.