

# Zoom Feather

A very popular lightweight portable flag ideal for indoor or outdoor displays and events

## features & benefits

- Suitable for indoor or outdoor use
- Ideal for point of sale, retail display or exhibition environments
- 4700mm high plus base height
- The design allows the flag to rotate when the wind direction changes
- Quick assembly, flat packs for easy transportation, carry bag included
- Choice of bases to suit a range of applications and venues



Weighting ring option



180mm fixing loop sewn to base of flag



Base foot



Weighting ring




Ground stake



Drive-on Car foot



Drive-on Car foot option

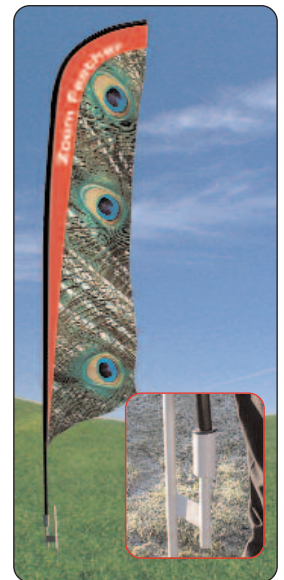

Ground stake option

## hardware specifications

Assembled dimensions:  
(base foot & weighting ring option)  
4700mm (h) x 870mm (w)  
*(varies depending on graphic tension)*  
Base foot dimensions: 560mm x 560mm approx  
Weight: 0.5kg approx  
Weighting ring dimensions: 470mm dia approx  
Weight: 0.15kg approx empty  
Weight: 6kg approx when filled with water  
Capacity: 6 litres of water approx  
Ground stake dimensions:  
800mm x 120mm approx  
Weight: 1.5kg approx  
Drive-on car foot dimensions:  
565mm x 330mm approx  
Weight: 1.8kg approx

## graphic specifications

Recommended substrate:  
**Lightweight flag textile**  
Recommended print process:  
Dye-sublimation print onto one side of the flag only  
Visual size & graphic dimensions:  
Refer to template:  
**zoom\_feather\_rev1**  
A full length pocket should be sewn into the left hand edge of the flag together with a fixing loop (see above), please refer to the template.  
**Note: The graphic template is an initial guideline only and may need dimensional adjustment dependant upon specific flag substrates used.**

## additional information

Zoom Feather flags are designed to withstand approximate windspeeds of 13 to 18 miles per hour (Beaufort Scale 4)  
  
Supplied bag dimensions:  
1480 (l) x 90mm (dia)  
  
Supporting poles and Base foot are supplied with carry bags. Ground Stake and Drive on-foot are **not** supplied with carry bags.

# Assembly Instructions


## Supporting pole/flag assembly



Assemble the bungee corded poles together.



Insert the middle sized GRP rod into the bungeed poles.



Feed the pole assembly (thinnest end first) into the flag pocket. **Warning: take care not to damage the pocket when inserting the rods/poles.** Bend the GRP rod to allow the flag to take shape and simply tie the loop to the fixing bracket



Insert the pole into the base adapter for use with base options.


## Base foot and weighting ring option




Open out the base foot.



Place the base foot on the ground.



Fill the weighting ring with water and place over the base foot. **Warning: Do not drop the weighting ring.**

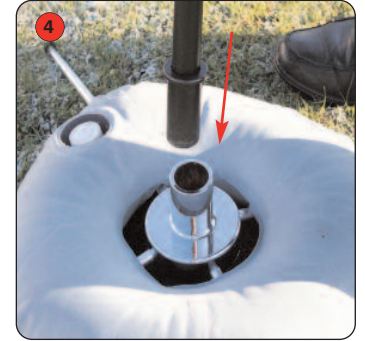


Fit the supporting pole/flag assembly into the base foot.

## Ground stake option



Push the the ground stake firmly into the ground.



Insert the supporting pole/flag assembly into the ground stake.

## Drive-on car foot option



Drive vehicle onto the car-foot .



Insert the supporting pole/flag assembly into the car-foot